




PELI
BIO THERMAL™

Crēdo™

CARGO

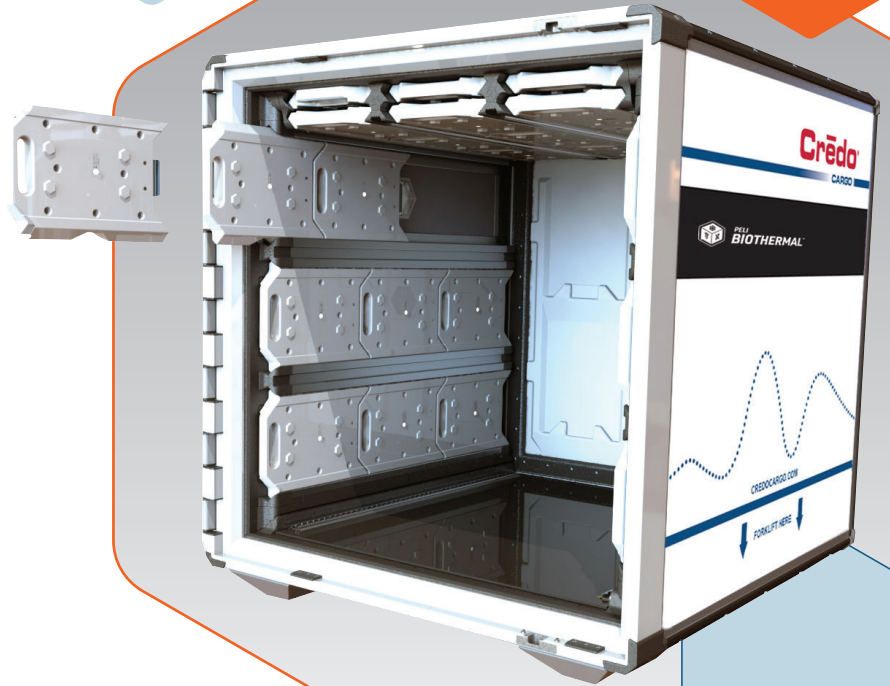

THE HIGH PERFORMANCE REUSABLE BULK SHIPPER

WHY CHOOSE CRĒDO™ CARGO?

- Reusable pallet shipper utilising PCM coolants
- Consistent temperature stability in excess of 120 - 144+ hours
- Easy-to-use coolant loading system
- Single door access with 270°C opening
- Lightweight & sturdy design with tough external wall construction to absorb and deflect impacts
- Designed to be stackable for easy storage
- Integral viewing windows to monitor condition of VIPs

Available via the Crēdo™ On Demand rental programme



FOR MORE INFORMATION ABOUT PELI BIOTHERMAL PRODUCTS, PLEASE CONTACT:

EMEA OFFICE - INFOEMEA@PELIBIOTHERMAL.COM T: +44 (0)1525 243 770

AMERICAS OFFICE - INFOAMERICAS@PELIBIOTHERMAL.COM T: +1(763) 412-4800

TOLL FREE US: T: +(877) 537-9800

ASIA OFFICE - INFOASIA@PELIBIOTHERMAL.COM T: +65 6681 0095

PELIBIOTHERMAL.COM

ISO17025, ISO9001-2008 Accredited

Golden Hour™, TIC™, Crēdo™, Crēdo Cube™, Crēdo ProEnvision™, Crēdo Xtreme™, Crēdo Duracube™, Crēdo ProMed™, Sherpa Systems™, CoolGuard™ and CoolPall™ are registered trademarks of Pelican Products Inc., its subsidiaries and / or affiliates



DURATION
120 - 144+ hours
(ISTA 7D)



TEMPERATURE
2°C to 8°C Chilled
15°C to 25°C Ambient
-20°C Frozen



VOLUME
1686L

OUTER DIMENSIONS
1560 x 1525 x 1600mm
61.42 x 60.04 x 63in

PAYLOAD DIMENSIONS
1295 x 1085 x 1200mm
50.98 x 42.72 x 47.24in

MAX PAYLOAD
1000KG
2205LBS

TARE WEIGHT
584KG 2°C to 8°C
582KG 15°C to 25°C
667KG -20°C



PELI
BIO THERMAL™

©2022 Peli BioThermal Ltd all rights reserved